

**SPECIFICATION**

**Number of channels**

One

**Location of load**

Zone 0, IIB, T4-6 hazardous area if suitably certified  
 Div. 1, Group C hazardous location  
 Minimum output voltage Equivalent output circuit

**Input voltage**

20 to 35V dc

**Hazardous-area output**

Minimum output voltage: 9.9V at 70mA  
 Maximum output voltage: 24V from 158Ω  
 Current limit: 70mA

**Output ripple**

< 0.5% of maximum output, peak to peak

**Response time**

Output within 10% of final value within 100ms

\*Signal plug HAZ1-3 is required for access to this function

**LED indicator**

Yellow: output status, on when output active  
 Maximum current consumption  
 125mA (typ.) at 24V

**Power dissipation within unit**

1.4W at 24V



**Safety description**

$V_o=25V$   $I_o=166mA$   $P_o=1.04W$   $U_m = 253V$  rms or dc

**SIL capable**

These models have been assessed for use in IEC

**Wiring**

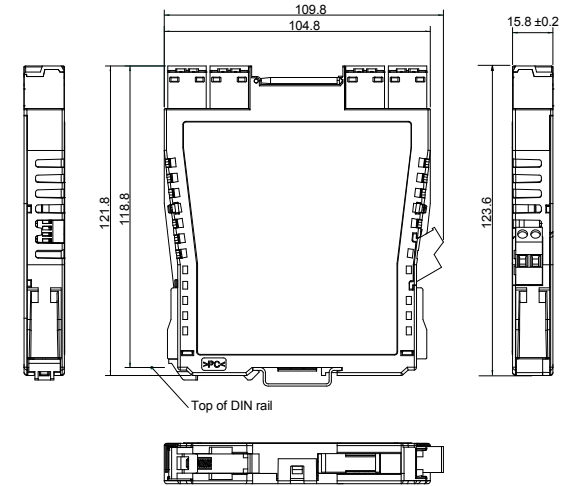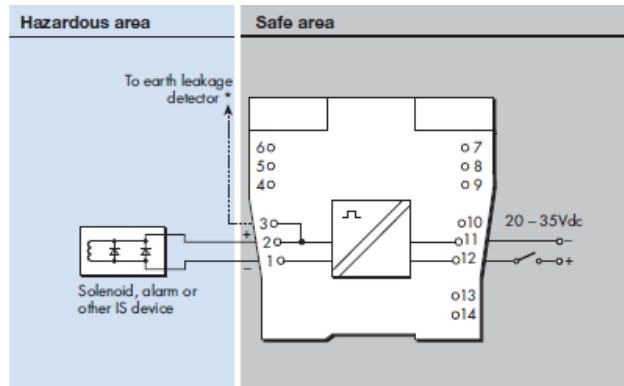

**Isolation**

250V rms, tested at 1500V rms minimum, between safe- and hazardous-area terminals.

50V between safe-area circuits and power supply

**Supply voltage**

20 - 35V dc

**Location of units**

Safe area

**Terminals**

Accepts conductors of up to 2.5mm<sup>2</sup> stranded or single-core  
 Mounting

T-section 35mm DIN rail (7.5 or 15mm) to EN 50022

**Ambient temperature limits**

-20 to +60° C (-6 to +140° F) operating

-40 to +80° C (-40 to +176° F) storage

**Humidity**

5 to 95% relative humidity

**Weight**

Approximate (except where indicated)

MTL5500 150g

**Connectors**

Each unit is supplied with signal connectors, as applicable.

When using crimp ferrules for the hazardous or non-hazardous (safe) signal connectors the metal tube length should be 12mm and the wire trim length 14mm.

REV.	PROJECT NAME:	Cooper Industries Japan K.K.		Model name		MTL5522	
REV.	USER NAME :	TEL: +81-(0)3-5420-1281		SIZE	FSCM NO	Drawing No.	rev
REV.	JOB NAME :	FAX: +81-(0)3-5420-2405		DATE: 2011/Jun/7			SS-MTL5522
	Ref no.:	CHKD T.IWANE	DRAWN K.KUSAKABE	SCALE	N/A	SHEET	1 / 1