


# Specifications

MTL Model NO.	Safety Description			Polarities Available			Typical Applications	Basic Circuit		Max. end-To-end resistance $\Omega$	Vwkg at $1\mu A$ V	Vmax V	Fuse rating mA	Remarks
	V	$\Omega$	mA	+	-	ac		Hazardous	Safe					
7758+/-	7.5	10	750	↙	↘		Gas detectors		17	6.0	7.3	200		

## Dimensions in mm

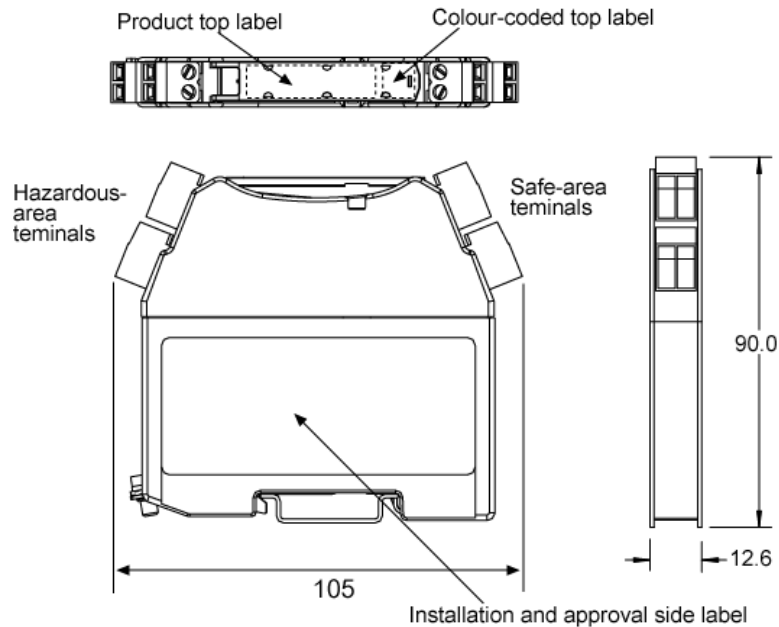

## Common Specification

### Ambient temperature and humidity limits

Ambient temperature and humidity limits

-20°C~+60°C continuous working

-40°C~+80°C storage

5~95% RH

### Working voltage

0.6V : Leakage current is  $10\mu A$

### Terminations

Removable terminals accommodate conductors up to  $2.5\text{mm}^2$  (13AWG), Hazardous-area terminals are identified by blue labels. Removal force  $>15\text{N}$

### Colour coding of barrier label

Grey : Non-polarised

Red : positive polarity

Black : negative polarity

### Weight

140g approx

### Certificate No. (BASEEFA)

BAS01ATEX7217

REV.	PROJECT NAME:	<b>Cooper Industries Japan K.K.</b> Tokyo, Japan TEL: +81-(0)3-6430-3128 FAX: +81-(0)3-6430-3129	Title		M7L7758 Specification				
REV.	USER NAME :		SIZE	FSCM NO	Drawing No.	rev			
REV.	JOB NAME :		DATE:	2009/9/29		SS-M7L7758(E)			
	Ref no.:	CHKD	K.T	DRAWN	I.S	SCALE	N/A	SHEET	1 / 1